



STACKLED

WATERPROOF LED LIGHT FIXTURE

ADVANTAGES

- ▶ Tri-proof led fixture for IP65 water-proof dust-proof corrosion-proof
- ▶ Patent and functional design with imaginative appearance
- ▶ High stability isolated driver
- ▶ Excellent heat dissipation depend on whole aluminum house
- ▶ Widely use for ambient lighting application
- ▶ Maximum efficacy and minimum glare
- ▶ High-tech optical design
- ▶ No UV ,No lead, No Mercury

Temperature Characteristics T_{ambient} 25°C


Temperature
 Operating -20~+40°C
 Storage -40~+85°C




Electrical Characteristics

Input Voltage: AC100~277V 50/60HZ
 PF: ≥0.93
 Power Efficiency: ≥0.87


Installation

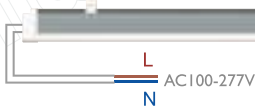

Light Distribution Curve



Dimension

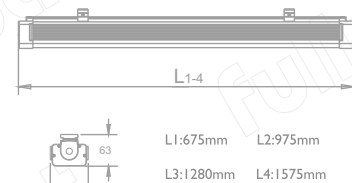

Model NO.	Power (W)	Light Source	LED QTY (pcs)	CCT (K)	Luminous Flux(Lm)	Efficiency (Lm/W)	CRI	Beam Angle
STACKLED-6-BX-D2	20	2835	108	3000 BC 4000 BN 6000 BF	1900	95	>80	110°
STACKLED-9-BX-D2	30	2835	156	3000 BC 4000 BN 6000 BF	2850	95	>80	110°
STACKLED-12-BX-D2	40	2835	216	3000 BC 4000 BN 6000 BF	3900	95	>80	110°
STACKLED-15-BX-D2	50	2835	264	3000 BC 4000 BN 6000 BF	4750	95	>80	110°

