

# fullwat®

## KRYLAST-GS SERIES

**Color Range:** Warm White (3000K). Daylight White (4000K).  
Pure White (5500K).

**Light Source:** SMD 3528 LED.

**Housing:** AL and High Strength PC.

**Operation Temperature:** -20°C to +40°C.

**Life Span:** 50.000 hours duty cycle.

**Voltage Range:** AC100 - 277V.

**Frequency:** 50Hz / 60Hz.

**Beam Angle:** 120°.

**PC Lens:** Clear / Frosted.

**Color Index (CRI):**  $\geq 80$ .

**PF:**  $\geq 0.93$ .

**Power Efficiency:**  $\geq 0.87$ .

**Net Weight:** 210g/600mm 368g/1200mm 443g/1200mm.

**Accessory:** LED Starter included.






- Aluminium PCB better heat dissipation than FR4.
- Isolating driver inside.
- VDE / TUV / UL certifications.
- Patented 180Deg rotating end cap design.
- 50.000h lifetime.
- Up to 70% energy saving.
- High Color Rendering Index CRI>80.
- Just replace starter with Fullwat LED starter for retrofit.
- Single end power anti electric shock.



**Introduction**

The world's most excellent & professional LED tube for all indoor lighting.

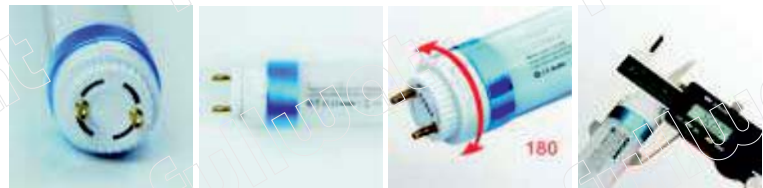

**Application**

Office, Shopping Malls, Railway Stations, Airports and Factories etc..



Airport



Station



Train



Ship



Hospital

**Parameter**

Model	Power(W)	Size(mm)	LEDs(pcs)	Color	Frosted Lens		Clear Lens	
					Lumen	Lm/W	Lumen	Lm/W
KRYLAST-6GS-BN-D1	11	26*588	108	4000K *	1045	95	1155	105
KRYLAST-9GS-BN-D1	17	26*894	168	4000K *	1615	95	1785	105
KRYLAST-12GS-BN-D1	20	26*1198	220	4000K *	1900	95	2100	105
KRYLAST-15GS-BN-D1	24	26*1498	240	4000K *	2280	95	2520	105

\*Available in: BC 3000K / BN 4000K / BF 5500K.